
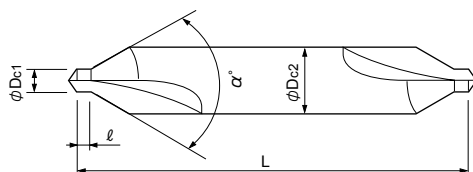


穴あけ用

ソリッドセンタドリル

CDL / S-CDL形

●ロングタイプ

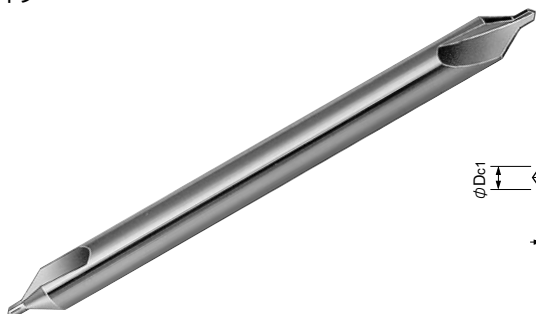

材種: ノンコート超微粒子超硬合金

形 番		在庫	寸 法 (mm)				
			α°	ϕD_{c1}	ℓ	ϕD_{c2}	L
CDL60-1004-100	S-CDL 1 ×60	☐	60°	1	1	4	100
CDL60-1505-100	S-CDL 1.5 ×60	☐		1.5	1.5	5	100
CDL60-2006-100	S-CDL 2 ×60	☐		2	2	6	100
CDL60-2006-150	S-CDLL 2 ×60	☐		2	2	6	150
CDL60-2508-100	S-CDL 2.5 ×60	☐		2.5	2.5	8	100
CDL60-2508-150	S-CDLL 2.5×60	☐		2.5	2.5	8	150
CDL60-3008-100	S-CDL 3 ×60	☐		3	3	8	100
CDL60-3008-150	S-CDLL 3 ×60	☐		3	3	8	150
CDL60-4010-100	S-CDL 4 ×60	☐		4	4	10	100
CDL60-4010-150	S-CDLL 4 ×60	☐		4	4	10	150
CDL60-5012-100	S-CDL 5 ×60	☐		5	5	12	100
CDL60-5012-150	S-CDLL 5 ×60	☐		5	5	12	150
CDL90-1004-100	S-CDL 1 ×90	☐	90°	1	1	4	100
CDL90-1505-100	S-CDL 1.5 ×90	☐		1.5	1.5	5	100
CDL90-2006-100	S-CDL 2 ×90	☐		2	2	6	100
CDL90-2006-150	S-CDLL 2 ×90	☐		2	2	6	150
CDL90-2508-100	S-CDL 2.5 ×90	☐		2.5	2.5	8	100
CDL90-2508-150	S-CDLL 2.5×90	☐		2.5	2.5	8	150
CDL90-3008-100	S-CDL 3 ×90	☐		3	3	8	100
CDL90-3008-150	S-CDLL 3 ×90	☐		3	3	8	150
CDL90-4010-100	S-CDL 4 ×90	☐		4	4	10	100
CDL90-4010-150	S-CDLL 4 ×90	☐		4	4	10	150
CDL90-5012-100	S-CDL 5 ×90	☐		5	5	12	100
CDL90-5012-150	S-CDLL 5 ×90	☐		5	5	12	150

614