


穴あけ用

ソリッドセンタドリル

CDS / S-CDR形

●標準タイプ

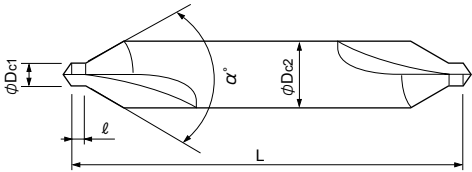

材種: ノンコート超微粒子超硬合金

形 番		在庫	寸 法 (mm)				
			α°	$\phi Dc1$	ℓ	$\phi Dc2$	L
CDS60-10-4	S-CDR 1 ×60	☐	60°	1	1	4	45
CDS60-15-5	S-CDR 1.5×60	☐		1.5	1.5	5	50
CDS60-20-6	S-CDR 2 ×60	☐		2	2	6	55
CDS60-25-7.7	S-CDR 2.5×60	☐		2.5	2.5	7.7	60
CDS60-25-8	S-CDR 2.5×60-8	☐		2.5	2.5	8	60
CDS60-30-7.7	S-CDR 3 ×60	☐		3	3	7.7	65
CDS60-30-8	S-CDR 3 ×60-8	☐		3	3	8	65
CDS60-40-10	S-CDR 4 ×60	☐		4	4	10	65
CDS60-50-11	S-CDR 5 ×60	☐		5	5	11	78
CDS60-50-12	S-CDR 5 ×60-12	☐		5	5	12	78
CDS60-60-18	S-CDR 6 ×60	☐		6	6	18	90
CDS90-10-4	S-CDR 1 ×90	☐	90°	1	1	4	45
CDS90-15-5	S-CDR 1.5×90	☐		1.5	1.5	5	50
CDS90-20-6	S-CDR 2 ×90	☐		2	2	6	55
CDS90-25-8	S-CDR 2.5×90	☐		2.5	2.5	8	60
CDS90-30-8	S-CDR 3 ×90	☐		3	3	8	65
CDS90-40-10	S-CDR 4 ×90	☐		4	4	10	65
CDS90-50-12	S-CDR 5 ×90	☐		5	5	12	78
CDS90-60-18	S-CDR 6 ×90	☐		6	6	18	90

541