


● 50 ～ 68HRC の焼入鋼の高能率加工が可能です。

This drill meets high efficiency drilling of Hardened Steel.
(50°68HRC)

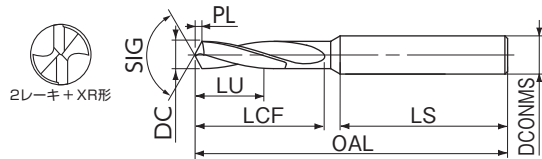

LIST 9548

オーダ方法 商品記号

単位 (Unit) : mm

商品記号 Code	直径 DC	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	シャンク径 DCONMS	先端 PL	在庫 Stock	参考価格(円) Price (¥)
AQDH2.0	2.0	9	12		44			●	2,870
AQDH2.1	2.1	8.9					0.4		3,080
AQDH2.2	2.2	9.7	13		45			□	—
AQDH2.3	2.3	9.6						—	—
AQDH2.4	2.4	10.4						—	—
AQDH2.5	2.5	10.3	14	28	46	3		●	3,080
AQDH2.6	2.6	10.1					0.5		3,080
AQDH2.7	2.7	12						—	—
AQDH2.8	2.8	11.8	16		48			□	—
AQDH2.9	2.9	11.7						—	—
AQDH3.0	3.0	11.5						●	3,080
AQDH3.1	3.1	13.4					0.6		—
AQDH3.2	3.2	13.2	18		50			□	—
AQDH3.3	3.3	13.1						—	—
AQDH3.4	3.4	14.9						●	8,280
AQDH3.5	3.5	14.8					0.7		8,280
AQDH3.6	3.6	14.6	20	30	52	4		□	—
AQDH3.7	3.7	14.5						—	—
AQDH3.8	3.8	16.3					0.8		—
AQDH3.9	3.9	16.2						—	—
AQDH4.0	4.0	16	22		54			●	8,750
AQDH4.1	4.1	15.9					0.9		—
AQDH4.2	4.2	15.7						□	—
AQDH4.3	4.3	17.6						●	9,350
AQDH4.4	4.4	17.4					0.8		—
AQDH4.5	4.5	17.3	24		68			●	9,350
AQDH4.6	4.6	17.1						—	—
AQDH4.7	4.7	17					0.9		—
AQDH4.8	4.8	18.8						□	—
AQDH4.9	4.9	18.7						—	—
AQDH5.0	5.0	18.5	26		70	6		●	9,980
AQDH5.1	5.1	18.4					1		10,600
AQDH5.2	5.2	18.2						□	—
AQDH5.3	5.3	18.1						—	—
AQDH5.4	5.4	19.9						●	10,600
AQDH5.5	5.5	19.8					1.1		—
AQDH5.6	5.6	19.6	28		72			□	—
AQDH5.7	5.7	19.5						—	—
AQDH5.8	5.8	19.3					1.2		—
AQDH5.9	5.9	19.2						—	—
AQDH6.0	6.0	19	38					●	11,000
AQDH6.1	6.1	21.9						□	—
AQDH6.2	6.2	21.7						—	—
AQDH6.3	6.3	21.6					1.3		—
AQDH6.4	6.4	21.4	31		75			□	—
AQDH6.5	6.5	21.3						●	11,000
AQDH6.6	6.6	21.1					1.4		—
AQDH6.7	6.7	21						□	—
AQDH6.8	6.8	23.8						—	—
AQDH6.9	6.9	23.7						●	11,800
AQDH7.0	7.0	23.5					1.3		11,800
AQDH7.1	7.1	23.4	34		78			□	—
AQDH7.2	7.2	23.2						—	—
AQDH7.3	7.3	23.1						—	—
AQDH7.4	7.4	22.9						●	12,500
AQDH7.5	7.5	22.8					1.4		—
AQDH7.6	7.6	25.6						□	—
AQDH7.7	7.7	25.5	37		81			—	—
AQDH7.8	7.8	25.3						—	—
AQDH7.9	7.9	25.2						—	—

商品記号 Code	直径 DC	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	シャンク径 DCONMS	先端 PL	在庫 Stock	参考価格(円) Price (¥)
AQDH8.0	8.0	25		38	81	8		●	13,000
AQDH8.1	8.1	24.9					1.5	□	—
AQDH8.2	8.2	24.7	37		87			—	—
AQDH8.3	8.3	24.6						—	—
AQDH8.4	8.4	24.4						—	—
AQDH8.5	8.5	24.3						●	13,900
AQDH8.6	8.6	27.1					1.6	□	14,500
AQDH8.7	8.7	27						—	—
AQDH8.8	8.8	26.8						—	—
AQDH8.9	8.9	26.7						—	—
AQDH9.0	9.0	26.5	40	44	90	10		●	14,500
AQDH9.1	9.1	26.4					1.7	□	—
AQDH9.2	9.2	26.2						—	—
AQDH9.3	9.3	26.1						—	—
AQDH9.4	9.4	25.9						●	15,200
AQDH9.5	9.5	25.8					1.8	□	—
AQDH9.6	9.6	28.6						—	—
AQDH9.7	9.7	28.5						—	—
AQDH9.8	9.8	28.3						—	—
AQDH9.9	9.9	28.2						—	—
AQDH10.0	10.0	28	43		93			●	16,000
AQDH10.1	10.1	27.9					1.9	□	—
AQDH10.2	10.2	27.7						—	—
AQDH10.3	10.3	27.6						●	16,600
AQDH10.4	10.4	27.4						—	—
AQDH10.5	10.5	27.3						●	16,600
AQDH10.6	10.6	27.1						—	—
AQDH10.7	10.7	31						—	—
AQDH10.8	10.8	30.8						—	—
AQDH10.9	10.9	30.7						—	—
AQDH11.0	11.0	30.5	46		100	12	2	●	17,300
AQDH11.1	11.1	30.4						□	—
AQDH11.2	11.2	30.2						—	—
AQDH11.3	11.3	30.1	47		104			—	—
AQDH11.4	11.4	29.9						—	—
AQDH11.5	11.5	29.8					2.1	●	18,100
AQDH11.6	11.6	29.6						□	—
AQDH11.7	11.7	29.5						—	—
AQDH11.8	11.8	29.3						—	—
AQDH11.9	11.9	33.2	51		108		2.2	—	—
AQDH12.0	12.0	33						●	18,600

一般 構造用鋼	炭素鋼	合金鋼 調質鋼	ダイス鋼 プリハードン鋼	高硬度鋼	
SS400	S45C S50C	SCM NAK	30～40 HRC	40～50 HRC	50～65HRC
×	×	×	×	—	◎
ステンレス鋼		Ti 合金 耐熱合金	鋳鉄	アルミ合金	銅合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	×	×	—	×	×

◎:最適 Excellent ○:適用 Good ×:不適 Not Used - :推奨しません Not recommended