


●アルミ合金の高能率加工が可能です。

High efficiency drilling of Aluminum Alloy is available.

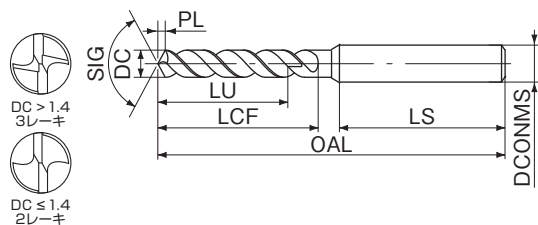

LIST 544

オーダ方法 **DLCHD** 直径

単位 (Unit) : mm

直径 DC	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	シャンク径 DCONMS	先端 PL	在庫 Stock	参考価格 (円) Price (¥)
1.0	10.5	12				0.2		982
1.1	12.4	14				0.2		910
1.2	14.2	16			50	0.2		910
1.3	14.1					0.3		910
1.4	15.9					0.3		910
1.5	15.8	18				0.3		910
1.6	17.6					0.4		910
1.7	17.5	20			56	0.4		815
1.8	19.3					0.4		815
1.9	19.2	22				0.4		815
2.0	21					0.4		815
2.1	20.9	24	28		3	0.4		948
2.2	21.7					0.5		948
2.3	21.6	25				0.5		948
2.4	26.4					0.5		948
2.5	26.3	30				0.5		815
2.6	26.1				64	0.5		915
2.7	29					0.6		915
2.8	28.8	33				0.6		915
2.9	28.7					0.6		915
3.0	28.5					0.7		747
3.1	31.4					0.7		948
3.2	31.2	36			71	0.7		948
3.3	31.1					0.7		948
3.4	33.9					0.7		948
3.5	33.8	39	30		4	0.7		948
3.6	33.6					0.8		1,130
3.7	33.5					0.8		1,130
3.8	37.3				75	0.8		1,030
3.9	37.2	43				0.8		1,130
4.0	37					0.9		1,030
4.1	36.9					0.9		1,360
4.2	36.7	47			89	0.9		1,240
4.3	40.6					0.9		1,360
4.4	40.4					1		1,360
4.5	40.3					1		1,240
4.6	40.1					1		1,610
4.7	40					1		1,610
4.8	44.8					1.1		1,610
4.9	44.7	52			94	1.1		1,610
5.0	44.5					1.1		1,450
5.1	44.4					1.1		1,450
5.2	44.2					1.2		1,670
5.3	44.1					1.2		1,870
5.4	48.9					1.2		1,870
5.5	48.8					1.2		1,670
5.6	48.6	57			99	1.2		2,120
5.7	48.5					1.3		2,120
5.8	48.3					1.3		2,120
5.9	48.2					1.3		2,120
6.0	48					1.4		1,930
6.1	53.9					1.4		2,380
6.2	53.7					1.4		2,380
6.3	53.6					1.4		2,380
6.4	53.4				107	1.4		2,380
6.5	53.3					1.4		2,120
6.6	53.1					1.4		2,410
6.7	53					1.4		2,410
6.8	58.8	69			113	1.4		2,410
6.9	58.7					1.4		2,410

直径 DC	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	シャンク径 DCONMS	先端 PL	在庫 Stock	参考価格 (円) Price (¥)
7.0	58.5					1.4		2,270
7.1	58.4					1.4		2,500
7.2	58.2	69				1.5		2,500
7.3	58.1				113	1.5		2,500
7.4	57.9					1.5		2,500
7.5	57.8					1.5		2,500
7.6	63.6					1.6		2,780
7.7	63.5					1.6		2,780
7.8	63.3				119	1.6		2,780
7.9	63.2					1.6		2,780
8.0	63					1.6		2,610
8.1	62.9	75				1.7		3,070
8.2	62.7					1.7		3,070
8.3	62.6				125	1.7		3,070
8.4	62.4					1.7		3,070
8.5	62.3					1.7		2,780
8.6	68.1					1.8		2,780
8.7	68					1.8		3,440
8.8	67.8					1.8		3,440
8.9	67.7					1.8		3,440
9.0	67.5					1.9		2,860
9.1	67.4	81	43.5	131	10	1.9		3,830
9.2	67.2					1.9		3,830
9.3	67.1					1.9		3,830
9.4	66.9					1.9		3,830
9.5	66.8					1.9		3,520
9.6	72.6					2		4,310
9.7	72.5					2		4,310
9.8	72.3				137	2		4,310
9.9	72.2					2		4,310
10.0	72					2		3,640
10.1	71.9	87				2.1		4,810
10.2	71.7					2.1		4,810
10.3	71.6				144	2.1		4,810
10.4	71.4					2.2		4,810
10.5	71.3					2.2		4,420
10.6	71.1					2.2		5,290
10.7	78					2.2		5,290
10.8	77.8					2.3		5,290
10.9	77.7					2.3		5,290
11.0	77.5					2.3		5,190
11.1	77.4					2.3		5,920
11.2	77.2				151	2.3		5,920
11.3	77.1					2.3		5,920
11.4	76.9					2.4		5,920
11.5	76.8					2.4		5,410
11.6	76.6					2.4		6,410
11.7	76.5					2.4		6,410
11.8	76.3					2.5		6,410
11.9	83.2					2.5		6,410
12.0	83					2.5		5,500
12.1	82.9					2.5		6,960
12.2	82.7					2.5		6,960
12.3	82.6					2.5		6,960
12.4	82.4					2.6		6,960
12.5	82.3					2.6		6,410
12.6	82.1					2.6		7,390
12.7	82					2.6		7,390
12.8	81.8					2.7		7,390
12.9	81.7					2.7		7,390

新商品

超硬ドリル

ハイスドリル

タップ

超硬
エンドミル

ハイス
エンドミル

切断工具

バック・
セット商品
その他

精密工具

技術資料
索引

新品

超硬ドリル

← 前頁 Previous Page

単位 (Unit) : mm

直径 DC	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	シャンク径 DCOMMS	先端 PL	在庫 Stock	参考価格 (円) Price (¥)
13.0	81.5	101	50	158	12	2.7	●	6,590
13.5	87.8	108		168	16	2.8	□	-
14.0	87					2.9		-
14.5	92.3	114		173	3	-		
15.0	91.5		180	3.1	-			
15.5	96.8	120	185	3.2	-			
16.0	96			3.3	-			
16.5	100.3	125	189	3.4	-			
17.0	99.5			3.5	-			
17.5	103.8	130	194	3.6	-			
18.0	103		198	3.7	-			
18.5	107.3	135	206	3.8	-			
19.0	106.5		210	3.9	-			
19.5	110.8	140	210	25	4	-		
20.0	110				4.1	-		

タップ

超硬
エンドミル

ハイス
エンドミル

切断工具

バック・
セット商品
その他

精密工具

技術資料
索引

一般 構造用鋼	炭素鋼	合金鋼 調質鋼	ダイス鋼 プリハードン鋼	高硬度鋼	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
—	×	×	×	×	×
ステンレス鋼		Ti 合金 耐熱合金	鋳鉄	アルミ合金	銅合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	×	×	—	◎	○

◎:最適 Excellent ○:適用 Good ×:不適 Not Used —:推奨しません Not recommended