


●アルミ合金の深穴の高効率加工が可能です。

This drill is suitable for the high efficiency and deep hole drilling in Aluminum Alloy.

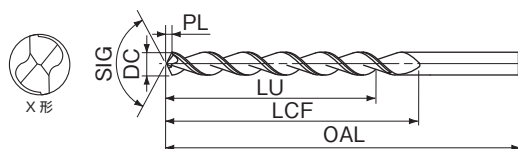

新商品

オーダ方法 DLCPLSD 直径 × 全長

単位 (Unit) : mm

直径 DC	全長 OAL	有効長 LU	溝長 LCF	先端 PL	在庫 Stock
1.0	56	31.5	33	0.3	□
1.0	100	58.5	60		
1.1	60	35.4	37		
1.1	100	58.4	60		
1.2	65	39.2	41	0.4	
1.2	105	63.2	65		
1.3	65	39.1	41		
1.3	105	63.1	65		
1.4	70	42.9	45	0.5	
1.4	110	67.9	70		
1.5	70	42.8	45		
1.5	110	67.8	70		
1.6	76	47.6	50	0.6	
1.6	115	72.6	75		
1.7	76	47.5	50		
1.7	115	72.5	75		
1.8	80	50.3	53	0.7	
1.8	120	77.3	80		
1.9	80	50.2	53		
1.9	120	77.2	80		
2.0	85	53	56	0.8	
2.0	125	82	85		
2.1	85	52.9	56		
2.1	125	81.9	85		
2.2	90	55.7	59	0.9	
2.2	135	86.7	90		
2.3	90	55.6	59		
2.3	135	86.6	90		
2.4	95	58.4	62	1.0	
2.4	140	91.4	95		
2.5	95	58.3	62		
2.5	140	91.3	95		
2.6	95	58.1	62	1.1	
2.6	140	91.1	95		
2.7	100	62	66		
2.7	150	96	100		
2.8	100	61.8	66	1.2	
2.8	150	95.8	100		
2.9	100	61.7	66		
2.9	150	95.7	100		
3.0	100	61.5	66	1.3	
3.0	150	95.5	100		
3.1	106	64.4	69		
3.1	155	100.4	105		
3.2	106	64.2	69	1.4	
3.2	155	100.2	105		
3.3	106	64.1	69		
3.3	155	100.1	105		
3.4	112	67.9	73	1.5	
3.4	165	109.9	115		
3.5	112	67.8	73		
3.5	165	109.8	115		
3.6	112	67.6	73	1.6	
3.6	165	109.6	115		
3.7	112	67.5	73		
3.7	165	109.5	115		
3.8	119	72.3	78	1.7	
3.8	175	114.3	120		
3.9	119	72.2	78		
3.9	175	114.2	120		
4.0	119	72	78	1.8	
4.0	175	114.1	120		
4.1	119	71.9	78		
4.1	175	113.9	120		

直径 DC	全長 OAL	有効長 LU	溝長 LCF	先端 PL	在庫 Stock
4.0	175	114	120	1.2	□
4.1	119	71.9	78		
4.1	175	113.9	120		
4.2	119	71.7	78		
4.2	175	113.7	120	1.3	
4.3	126	75.6	82		
4.3	185	118.6	125		
4.4	126	75.4	82		
4.4	185	118.4	125	1.4	
4.5	126	75.3	82		
4.5	185	118.3	125		
4.6	126	75.1	82		
4.6	185	118.1	125	1.5	
4.7	126	75	82		
4.7	185	118	125		
4.8	132	79.8	87		
4.8	195	127.8	135	1.6	
4.9	132	79.7	87		
4.9	195	127.7	135		
5.0	132	79.5	87		
5.0	195	127.5	135	1.7	
5.1	132	79.4	87		
5.1	195	127.4	135		
5.2	132	79.2	87		
5.2	195	127.2	135	1.8	
5.3	132	79.1	87		
5.3	195	127.1	135		
5.4	139	82.9	91		
5.4	205	131.9	140	1.9	
5.5	139	82.8	91		
5.5	205	131.8	140		
5.6	139	82.6	91		
5.6	205	131.6	140	2.0	
5.7	139	82.5	91		
5.7	205	131.5	140		
5.8	139	82.3	91		
5.8	205	131.3	140	2.1	
5.9	139	82.2	91		
5.9	205	131.2	140		
6.0	139	82	91		
6.0	205	131	140	2.2	
6.1	148	87.9	97		
6.1	215	140.9	150		
6.2	148	87.7	97		
6.2	215	140.7	150	2.3	
6.3	148	87.6	97		
6.3	215	140.6	150		
6.4	148	87.4	97		
6.4	215	140.4	150	2.4	
6.5	148	87.3	97		
6.5	215	140.3	150		
6.6	148	87.1	97		
6.6	215	140.1	150	2.5	
6.7	148	87	97		
6.7	215	140	150		
6.8	156	91.8	102		
6.8	225	144.8	155	2.6	
6.9	156	91.7	102		
6.9	225	144.7	155		
7.0	156	91.5	102		
7.0	225	144.5	155		

超硬ドリル

ハイスドリル

タップ

超硬
エンドミル

ハイス
エンドミル

切断工具

バック・
セット商品
その他

精密工具

技術資料
索引

← 前頁 Previous Page

単位 (Unit) : mm

新商品

超硬ドリル

ハイスドリル

タップ

超硬
エンドミル

ハイス
エンドミル

切断工具

バック・
セット商品
その他

精密工具

技術資料
索引

直径 DC	全長 OAL	有効長 LU	溝長 LCF	先端 PL	在庫 Stock
7.1	156	91.4	102	2.1	□
7.1	225	144.4	155		
7.2	156	91.2	102	2.2	
7.2	225	144.2	155		
7.3	156	91.1	102		
7.3	225	144.1	155		
7.4	156	90.9	102		
7.4	225	143.9	155		
7.5	156	90.8	102	2.3	
7.5	225	143.8	155		
7.6	165	97.6	109		
7.6	240	153.6	165		
7.7	165	97.5	109		
7.7	240	153.5	165		
7.8	165	97.3	109	2.4	
7.8	240	153.3	165		
7.9	165	97.2	109		
7.9	240	153.2	165		
8.0	165	97	109		
8.0	240	153	165		
8.1	165	96.9	109	2.5	
8.1	240	152.9	165		
8.2	165	96.7	109		
8.2	240	152.7	165		
8.3	165	96.6	109		
8.3	240	152.6	165		
8.4	165	96.4	109	2.6	
8.4	240	152.4	165		
8.5	165	96.3	109		
8.5	240	152.3	165		
8.6	175	102.1	115		
8.6	250	162.1	175		
8.7	175	102	115	2.7	
8.7	250	162	175		
8.8	175	101.8	115		
8.8	250	161.8	175		
8.9	175	101.7	115		
8.9	250	161.7	175		
9.0	175	101.5	115	2.8	
9.0	250	161.5	175		
9.1	175	101.4	115		
9.1	250	161.4	175		
9.2	175	101.2	115		
9.2	250	161.2	175		
9.3	175	101.1	115	2.9	
9.3	250	161.1	175		
9.4	175	100.9	115		
9.4	250	160.9	175		
9.5	175	100.8	115		
9.5	250	160.8	175		
9.6	184	106.6	121	3	
9.6	265	170.6	185		
9.7	184	106.5	121		
9.7	265	170.5	185		
9.8	184	106.3	121		
9.8	265	170.3	185		
9.9	184	106.2	121	3.1	
9.9	265	170.2	185		
10.0	184	106	121		
10.0	265	170	185		
10.1	184	105.9	121		
10.1	265	169.9	185		
10.2	184	105.7	121	3.2	
10.2	265	169.7	185		
10.3	184	105.6	121		
10.3	265	169.6	185		
10.4	184	105.4	121		
10.4	265	169.4	185		
10.5	184	105.3	121		
10.5	265	169.3	185		

直径 DC	全長 OAL	有効長 LU	溝長 LCF	先端 PL	在庫 Stock
10.6	184	105.1	121	3.2	□
10.6	265	169.1	185		
10.7	195	112	128		
10.7	280	179	195		
10.8	195	111.8	128		
10.8	280	178.8	195	3.3	
10.9	195	111.7	128		
10.9	280	178.7	195		
11.0	195	111.5	128		
11.0	280	178.5	195		
11.1	195	111.4	128	3.4	
11.1	280	178.4	195		
11.2	195	111.2	128		
11.2	280	178.2	195		
11.3	195	111.1	128		
11.3	280	178.1	195	3.5	
11.4	195	110.9	128		
11.4	280	177.9	195		
11.5	195	110.8	128		
11.5	280	177.8	195		
11.6	195	110.6	128	3.6	
11.6	280	177.6	195		
11.7	195	110.5	128		
11.7	280	177.5	195		
11.8	195	110.3	128		
11.8	280	177.3	195	3.7	
11.9	205	116.2	134		
11.9	295	187.2	205		
12.0	205	116	134		
12.0	295	187	205		
12.1	205	115.9	134	3.8	
12.1	295	186.9	205		
12.2	205	115.7	134		
12.2	295	186.7	205		
12.3	205	115.6	134		
12.3	295	186.6	205	3.9	
12.4	205	115.4	134		
12.4	295	186.4	205		
12.5	205	115.3	134		
12.5	295	186.3	205		
12.6	205	115.1	134	3.9	
12.6	295	186.1	205		
12.7	205	115	134		
12.7	295	186	205		
12.8	205	114.8	134		
12.8	295	185.8	205	3.9	
12.9	205	114.7	134		
12.9	295	185.7	205		
13.0	205	114.5	134		
13.0	295	185.5	205		

一般 構造用鋼	炭素鋼	合金鋼 調質鋼	ダイス鋼 プリハードン鋼	高硬度鋼	
SS400	S45C S50C	SCM NAK	30~40 HRC	40~50 HRC	50~65HRC
—	×	×	×	×	×
ステンレス鋼		Ti 合金 耐熱合金	鋳鉄	アルミ合金	銅合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
×	×	×	×	◎	○

◎:最適 Excellent ○:適用 Good ×:不適 Not Used —:推奨しません Not recommended