



工具材料

コーティング

直径許容差

先端角

ねじれ角

直径範囲

●鋼、ステンレス鋼、アルミに適した汎用のコーティングオイルホールドリルです。

●深い穴加工に最適です。

This is general coated taper shank drills with oil-hole.



新商品

超硬ドリル

ハイスクローバー

タップ

超硬エンドミル

ハイスクローバー

切断工具

パック・セット商品

その他


精密工具

技術資料索引

直径5.0~9.5
在庫品限り

オーダ方法 GTDOH 直径 × 全長

直径 DC	全長 LF	溝長 ℓ	先端 PL	シャンク MT No.	給油方式 Coolant Supply	在庫 Stock
5.0	250		1.5			
5.5	250		1.7			
6.0	250		1.8			
6.5	250		2			
7.0	250		2.1			
7.5	250		2.3			
8.0	250		2.4			
8.5	250		2.6			
9.0	250		2.7			
9.5	250		2.9			
10.0	250		3			
10.5	250		3.2			
11.0	250	150	3.3			
11.5	250		3.5			
12.0	250		3.6			
12.5	250		3.8			
13.0	250		3.9			
13.5	250		4.1			
14.0	250		4.2			
14.5	300	200	4.4			
15.0	250	150				
15.0	300	200	4.5			
15.5	300		4.7			
16.0	250	150				
16.0	300	200	4.8			
16.5	300		5			
17.0	250	150				
17.0	300	200	5.1			
17.5	300		5.3			
18.0	250	150				
18.0	300		5.4			
18.5	300		5.6			
19.0	300		5.7			
19.5	300		5.9			
20.0	300		6			
20.5	300		6.2			
21.0	300		6.3			
21.5	300		6.5			
22.0	300		6.6			
22.5	300		6.8			
23.0	300		6.9			
23.5	400		7.1			
24.0	400		7.2			
24.5	400		7.4			
25.0	400		7.5			
25.5	400		7.7			
26.0	400		7.8			
26.5	400		8			
27.0	400		8.1			
27.5	400		8.3			
28.0	400		8.4			
28.5	400		8.6			
29.0	400		8.7			
29.5	400		8.9			
30.0	400		9			
30.5	400		9.2			
31.0	400		9.3			
31.5	400		9.5			
32.0	400		9.6			
32.5	450	280	9.8	4		

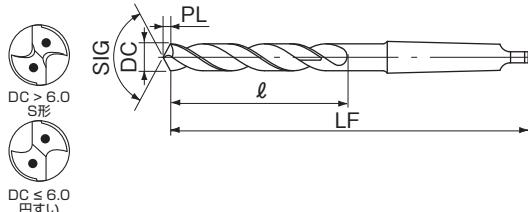

単位 (Unit) : mm

直径 DC	全長 LF	溝長 ℓ	先端 PL	シャンク MT No.	給油方式 Coolant Supply	在庫 Stock
33.0	450					
33.5	450					
34.0	450					
34.5	450					
35.0	450					
35.5	450					
36.0	450					
36.5	450					
37.0	450					
37.5	450					
38.0	450					
38.5	450					
39.0	450					
39.5	450					
40.0	450					
40.5	450					
41.0	450					
41.5	450	280				
42.0	450					
42.5	450					
43.0	450					
43.5	450					
44.0	450					
44.5	450					
45.0	450					
45.5	450					
46.0	450					
46.5	450					
47.0	450					
47.5	450					
48.0	450					
48.5	450					
49.0	450					
49.5	450					
50.0	450					

一般構造用鋼	炭素鋼	合金鋼調質鋼	ダイス鋼 ブリハードン鋼	高硬度鋼
SS400	S45C S50C	SCM NAK	30~40 HRC	40~50 HRC 50~65 HRC
○	○	○	○	×
ステンレス鋼		Ti 合金 耐熱合金	鋳鉄	アルミニウム 銅合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC Cu
○	○	○	○	○

◎:最適 Excellent ○:適用 Good ×:不適 Not Used -:推奨しません Not recommended