

●溝長が短く、高剛性なドリルです。


This side lock drill having short length is very stable.



写真 1
Picture 1



写真 2
Picture 2

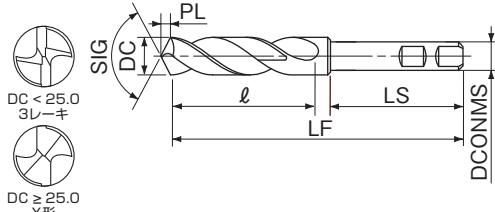

新商品

超硬ドリル

ハイスクロードル

タップ

超硬
エンドミル

ハイスクロ
エンドミル

切断工具

パック・
セット商品
その他

精密工具

技術資料
索引

オーダ方法 MCD 直径

(* 印商品 : MCD 直径 × シャンク径)

直径 DC	シャンク径 DCONMS	溝長 ℓ	全長 LF	先端 PL	写真 Picture	在庫 Stock
2.5						
2.6						
2.7	6					
2.8						
2.9						
* 3.0	3					
3.0						
3.1						
* 3.2	3					
3.2	6					
* 3.3	3					
3.3						
3.4	6					
* 3.5	3					
3.5						
3.6	6					
* 3.7	3					
3.7						
3.8	6					
3.9						
* 4.0	3					
4.0						
4.1						
4.2						
4.3						
4.4						
4.5						
4.6						
4.7						
4.8						
4.9						
5.0						
5.1						
5.2						
5.3						
5.4						
5.5						
5.6						
5.7						
5.8						
5.9						
6.0						
6.1						
6.2						
6.3						
6.4						
6.5						
6.6						
6.7						
6.8						
6.9						
7.0						
7.1						
7.2						
7.3						
7.4						
7.5						
7.6						
7.7						
7.8						

直径 DC	シャンク径 DCONMS	溝長 ℓ	全長 LF	先端 PL	写真 Picture	在庫 Stock
7.9	6					
8.0						
8.1						
8.2						
8.3						
8.4						
8.5						
8.6						
8.7						
8.8						
8.9						
9.0						
9.1						
9.2						
9.3						
9.4						
9.5						
9.6						
9.7						
9.8						
9.9						
10.0						
10.1						
10.2						
10.3						
10.4						
10.5						
10.6						
10.7						
10.8						
10.9						
11.0						
11.1						
11.2						
11.3						
11.4						
11.5						
11.6						
11.7						
11.8						
11.9						
12.0						
12.1						
12.2						
12.3						
12.4						
12.5						
12.6						
12.7						
12.8						
12.9						
13.0						
13.1						
13.2						
13.3						
13.4						
13.5						
13.6						
13.7						
14.0						
14.1						
14.2						
14.3						
14.4						

単位 (Unit) : mm

直径 DC	シャンク径 DCONMS	溝長 l	全長 LF	先端 PL	写真 Picture	在庫 Stock
14.6						
14.8						
15.0						
15.5						
15.6						
15.8						
16.0						
16.5						
16.6						
16.8						
17.0						
17.5						
17.6						
17.8						
18.0						
18.2						
18.5						
18.6						
18.8						
19.0						
19.5						
19.6						
19.8						
20.0						
20.5						
20.8						
21.0						
21.5						
21.8						
22.0						
22.5						
22.8						
23.0						
23.5						
23.8						
24.0						
24.5						
24.8						
25.0						
25.5						
26.0						
26.5						
27.0						
27.5						
28.0						
28.5						
29.0						
29.5						
30.0						
30.5						
31.0						
31.5						
32.0						
32.5						
33.0						
33.5						
34.0						
34.5						
35.0						
35.5						

直径 DC	シャンク径 DCONMS	溝長 l	全長 LF	先端 PL	写真 Picture	在庫 Stock
36.0						
36.5						
37.0						
37.5						
38.0						
38.5						
39.0						
39.5						
40.0						
41.0						
42.0						
43.0						
44.0						
45.0						
46.0						
47.0						
48.0						
49.0						
50.0						
51.0						
52.0						
53.0						
54.0						
55.0						
56.0						
57.0						
58.0						
59.0						
60.0						

シャンク径 DCONMS	シャンク長 LS
3	29
6.8	35
10, 12	43
16	48
20	60
25	63
32	67
42	77

一般構造用鋼	炭素鋼	合金鋼調質鋼	ダイス鋼 ブリハードン鋼	高硬度鋼
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC 50 ~ 65HRC
○	○	○	○	×
ステンレス鋼		Ti 合金 耐熱合金	鉄 アルミ合金	銅合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC Cu
○	○	—	○	○

◎:最適 Excellent ○:適用 Good ×:不適 Not Used -:推奨しません Not recommended