

●電気ドリル、ボール盤など三爪チャックで使用し  
やすいシャンクのドリルです。



### 6形 (1/4) 6Type

LIST 574

オーダ方法 NOS 直径 -4

直径 DC	溝長 ℓ	全長 LF	シャンク径 DCONMS	シャンク長 LS	先端 PL	在庫 Stock	参考価格 (円) Price (¥)
7.0					2.1		1,690
7.5					2.3		1,870
8.0	35	75			2.4		2,100
8.5				25	2.6		2,440
9.0					2.7		2,700
9.5					2.9		2,940
10.0					3	●	3,120
10.5					3.2		3,400
11.0					3.3		3,670
11.5	48	95		6.5	3.5		4,000
12.0					3.6		4,230
12.5					3.8		4,620
13.0					3.9		4,760


### 13形 (1/2) 13Type

LIST 578

オーダ方法 NOS 直径 -2

単位 (Unit) : mm

直径 DC	溝長 ℓ	全長 LF	シャンク径 DCONMS	シャンク長 LS	先端 PL	在庫 Stock	参考価格 (円) Price (¥)
13.1						3.9	-
13.2						4	-
13.3						●	5,310
13.4						4.1	-
13.5						4.2	5,740
13.6						4.3	-
13.7						4.4	6,120
13.8						4.5	6,460
13.9						4.6	-
14.0						4.7	6,830
14.1						4.8	7,270
14.2						4.9	-
14.3						5	7,650
14.4						5.1	7,960
14.5						5.2	-
14.6						5.3	8,380
14.7						5.4	8,660
14.8						5.5	-
14.9						5.6	9,110
15.0						5.7	9,570
15.1							-
15.2							-
15.3							-
15.4							-
15.5							-
15.6							-
15.7							-
15.8							-
15.9							-
16.0							-
16.1							-
16.2							-
16.3							-
16.4							-
16.5							-
16.6							-
16.7							-
16.8							-
16.9							-
17.0							-
17.1							-
17.2							-
17.3							-
17.4							-
17.5							-
17.6							-
17.7							-
17.8							-
17.9							-
18.0							-
18.1							-
18.2							-
18.3							-
18.4							-
18.5							-
18.6							-
18.7							-
18.8							-
18.9							-
19.0							-

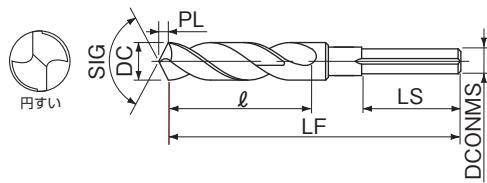

新商品

超硬ドリル

ハイドリル

タップ  
超硬エンドミル

ハイスエンドミル

パック・  
セット商品  
その他

精密工具

技術資料  
索引

シャンク部のV溝は円周上に3溝あります。これはスリップ止め用の溝で10形、13形に施してあります。保護リングも10形、13形についております。(6形にはV溝および保護リングはありません。) 包装数量は6形(1/4)のみ5本、その他は1本です。参考価格は1本あたりの価格です。

1本入りのNOSP(パック入り)(G-10)をご利用ください。

単位 (Unit) : mm

直径 DC	溝長 ℓ	全長 LF	シャンク径 DCONMS	シャンク長 LS	先端 PL	在庫 Stock	参考価格 (円) Price (¥)
19.1					5.7		-
19.2					5.8	□	-
19.3					5.9	●	10,000
19.4					6	●	10,300
19.5					6.1	●	10,600
19.6					6.2	□	-
19.7					6.3	●	11,000
19.8					6.4	□	-
19.9					6.5	●	11,300
20.0					6.6	●	11,800
20.1					6.7	□	-
20.2					6.8	●	12,400
20.3					6.9	□	-
20.4					7	●	12,800
20.5					7.1	□	-
20.6					7.2	●	13,700
20.7					7.3	□	-
20.8					7.4	●	14,000
20.9					7.5	□	-
21.0						●	14,500
21.1						—	-
21.2						—	-
21.3						—	-
21.4						—	-
21.5						—	-
21.6						—	-
21.7						—	-
21.8						—	-
21.9						—	-
22.0						—	-
22.1						—	-
22.2						—	-
22.3						—	-
22.4						—	-
22.5						—	-
22.6						—	-
22.7						—	-
22.8						—	-
22.9						—	-
23.0						—	-
23.1						—	-
23.2						—	-
23.3						—	-
23.4						—	-
23.5						—	-
23.6						—	-
23.7						—	-
23.8						—	-
23.9						—	-
24.0						—	-
24.1						—	-
24.2						—	-
24.3						—	-
24.4						—	-
24.5						—	-
24.6						—	-
24.7						—	-
24.8						—	-
24.9						—	-
25.0						●	15,200

直径 DC	溝長 ℓ	全長 LF	シャンク径 DCONMS	シャンク長 LS	先端 PL	在庫 Stock	参考価格 (円) Price (¥)
25.1					7.5		-
25.2					7.6	□	-
25.3					7.7	●	15,600
25.4					7.8	□	-
25.5					8.1	●	16,100
25.6					8.4	●	18,200
25.7					8.7	●	19,700
25.8					9	●	21,200
25.9					9.6	●	22,900
26.0							27,500
27.0							
28.0							
29.0							
30.0							
32.0							

一般構造用鋼	炭素鋼	合金鋼調質鋼	ダイス鋼 ブリハードン鋼	高硬度鋼	
SS400	S45C S50C	SCM NAK	30 ~ 40 HRC	40 ~ 50 HRC	50 ~ 65HRC
○	○	—	—	×	×
ステンレス鋼		Ti 合金 耐熱合金	鍛鉄	アルミ合金	銅合金
SUS304 SUS316	SUS420	Ti / Ni Alloy	FC / FCD	AC / ADC	Cu
—	—	—	○	○	○

◎:最適 Excellent ○:適用 Good ×:不適 Not Used -:推奨しません Not recommended