


●鋼、型鋼、アルミに最適なオイルホールドリルです。
ドリル径の3倍までの穴あけが可能です。

This oil hole drill is suitable for workpiece materials from Steel and Die Steel to Aluminum. It is possible to drill holes up to 3 × DC.

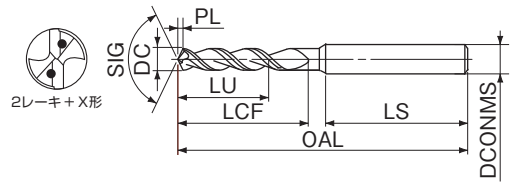

LIST 7588P

オーダ方法 SGOH3D 直径

単位 (Unit) : mm

直径 DC	有効長 LU	溝長 LCF	シャンク径 LS	全長 OAL	シャンク径 DCONMS	先端 PL	在庫 Stock
5.0	21.5	29		83		1	
5.1							
5.2	21.3						
5.3	21.2	29.1		83.1		1.1	
5.4	21						
5.5	20.9		50		6		
5.6	22.8						
5.7	22.7						
5.8	22.5	31.2		83.2		1.2	
5.9	22.4						
6.0	22.2						
6.1	25.2						
6.2	25						
6.3	24.9	34.3		89.3		1.3	
6.4	24.7						
6.5	24.6		51		7		
6.6	26.5						
6.7	26.4						
6.8	26.2	36.4		89.4		1.4	
6.9	26.1						
7.0	25.9						
7.1	28.9						
7.2	28.7						
7.3	28.6	39.5		95.5		1.5	
7.4	28.4						
7.5	30.2	39.6	52		8		
7.6	30.1						
7.7	30.1	41.6		95.6		1.6	
7.8	29.9						
7.9	29.8						
8.0	29.7	41.7		95.7			
8.1	32.6						
8.2	32.4	44.7		101.7		1.7	
8.3	32.3						
8.4	32.1						
8.5	32.1	44.8	53		9		
8.6	33.9						
8.7	33.8	46.8		101.8		1.8	
8.8	33.6						
8.9	33.5						
9.0	33.4	46.9		101.9			
9.1	36.3						
9.2	36.1	49.9		107.9		1.9	
9.3	36						
9.4	35.8						
9.5	35.8	50	54		10		
9.6	37.6						
9.7	37.5	52		108		2	
9.8	37.3						
9.9	37.1	52.1		108.1			
10.0	40						
10.1	40						
10.2	39.8	55.1		118.1		2.1	
10.3	39.7						
10.4	39.6						
10.5	39.5	55.2	60		11		
10.6	41.3						
10.7	41.2	57.2		118.2		2.2	
10.8							
10.9	41	57.3		118.3		2.3	

直径 DC	有効長 LU	溝長 LCF	シャンク径 LS	全長 OAL	シャンク径 DCONMS	先端 PL	在庫 Stock
11.0	40.8	57.3		118.3	11		
11.1	43.7						
11.2	43.5	60.3		124.3		2.3	
11.3	43.4						
11.4	43.3						
11.5	43.2	60.4	60		12	2.4	
11.6	45						
11.7	44.9	62.4		124.4			
11.8	44.7						
11.9		62.5		124.5			
12.0	44.5						
12.1	47.4						
12.2	47.2	65.5		130.5		2.5	
12.3	47.1						
12.4	47	65.6	61		13	2.6	
12.5	46.9	67.6		130.6			
12.6	48.7						
12.7	48.6						
12.8	48.5	67.7		130.7		2.7	
12.9	48.4						
13.0	48.2						
13.1	51.1	70.7		136.7			
13.2							
13.3	50.9						
13.4	50.7	70.8		136.8		2.8	
13.5	50.6		62		14		
13.6	52.4	72.8		136.9			
13.7	52.3						
13.8	52.2	72.9		136.9			
13.9	52.1						
14.0	51.9						
14.1	54.8	75.9		142.9		2.9	
14.2							
14.3	54.6						
14.4	54.4	76		143		3	
14.5	54.3		63		15		
14.6	56.1	78		143.1			
14.7	56						
14.8	55.9	78.1		143.1		3.1	
14.9	55.8						
15.0	55.6						
15.1	58.5	81.1		149.1			
15.2							
15.3	58.3						
15.4	58.1	81.2		149.2		3.2	
15.5	58		64		16		
15.6	59.8	83.2		149.3			
15.7							
15.8	59.6	83.3		149.3		3.3	
15.9	59.5						
16.0	59.3						
16.1	62.2	86.3		159.3			
16.2	62.1						
16.3	62	86.4		159.4		3.4	
16.4	61.8						
16.5	61.7	88.4		159.5			
16.6	63.5						
16.7							
16.8	63.3	88.5		159.5		3.5	
16.9	63.2						

直径 DC	有効長 LU	溝長 LCF	シャンク径 LS	全長 OAL	シャンク径 DCONMS	先端 PL	在庫 Stock
17.0	63	88.5		159.5	17		
17.1	65.9	91.5		165.5		3.5	
17.2	65.8						
17.3	65.7						
17.4	65.5	91.6		165.6		3.6	
17.5	65.4						
17.6	67.2	93.6					
17.7							
17.8	67	93.7		165.7		3.7	
17.9	66.9						
18.0	66.7						
18.1	69.6	96.7		171.7			
18.2	69.5						
18.3	69.4	96.8		171.8		3.8	
18.4	69.2						
18.5	69.1		70		19		
18.6	71						
18.7	70.9						
18.8	70.7	98.9		171.9		3.9	
18.9	70.6						
19.0	70.4						
19.1	73.4						
19.2	73.2						
19.3	73.1	102		178		4	
19.4	72.9						
19.5	72.8						
19.6	74.7						
19.7	74.6	104.1		178.1		4.1	
19.8	74.4						
19.9	74.3						
20.0	74.1						