


●鋼、ステンレス鋼、アルミに最適なオイルホールドリルです。ドリル径の7倍までの穴あけが可能です。

This oil hole drill is suitable for workpiece materials from Steel and Stainless Steel to Aluminum. It is possible to drill holes up to 7 × DC.

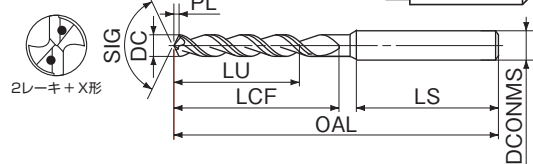

LIST 7592P

オーダ方法 SGOH7D 直径 (* 印商品: SGOH7D 直径 × シャンク径)

単位 (Unit) : mm

直径 DC	シャンク径 DCONMS	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	先端 PL	在庫 Stock
5.0		43.5	51		111	1	
5.1		43.5					
5.2		43.3					
5.3		43.2	51.1		111.1	1.1	
5.4		43					
5.5	6	42.9		50			
5.6		46.8					
5.7		46.7					
5.8		46.5	55.2		111.2	1.2	
5.9		46.4					
6.0		46.2					
6.1		51.2					
6.2		51					
6.3		50.9	60.3		121.3	1.3	
6.4		50.7					
6.5	7	50.6		51			
6.6		54.5					
6.7		54.4					
6.8		54.2	64.4		121.4	1.4	
6.9		54.1					
7.0		53.9					
7.1		58.9					
7.2		58.7	69.5		131.5	1.5	
7.3		58.6					
7.4		58.4					
7.5	8	62.2	69.6	52			
7.6		62.1					
7.7		62.1	73.6		131.6	1.6	
7.8		61.9					
7.9		61.8					
8.0		61.7	73.7		131.7		
8.1		66.6					
8.2		66.4	78.7		141.7	1.7	
8.3		66.3					
8.4		66.1					
8.5	9	78.8	53				
8.6		69.9					
8.7		69.8	82.8		141.8	1.8	
8.8		69.6					
8.9		69.5					
9.0		69.4	82.9		141.9		
9.1		74.3					
9.2		74.1	87.9		151.9	1.9	
9.3		74					
9.4		73.8					
9.5	10	88	54				
9.6		77.6					
9.7		77.5	92		152	2	
9.8		77.3					
9.9		77.1	92.1		152.1		
10.0		77.1					
10.1		82					
10.2		81.8	97.1		172.1	2.1	
10.3		81.7					
10.4		81.6	97.2				
10.5	11	81.5	60				
10.6		85.3					
10.7		85.2	101.2		172.2	2.2	
10.8		85					
10.9			101.3		172.3	2.3	

直径 DC	シャンク径 DCONMS	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	先端 PL	在庫 Stock
11.0	11	84.8	101.3		172.3		
11.1		89.7					
11.2		89.5	106.3		182.3	2.3	
11.3		89.4					
11.4		89.3					
11.5	12	89.2	106.4	60			
11.6		93					
11.7		92.9	110.4		182.4	2.4	
11.8		92.7					
11.9		92.5	110.5		182.5		
12.0		92.5					
12.1		97.4					
12.2		97.2	115.5		192.5	2.5	
12.3		97.1					
12.4		97	115.6				
12.5	13	96.9					
12.6		100.7	119.6		192.6	2.6	
12.7		100.6					
12.8		100.5					
12.9		100.4	119.7		192.7	2.7	
13.0		100.2					
13.1		105.1	124.7		202.7		
13.2		104.9					
13.3		104.7	124.8				
13.4		104.6					
13.5	14	104.6					
13.6		108.4	128.8		202.8	2.8	
13.7		108.3					
13.8		108.2					
13.9		108.1	128.9		202.9		
14.0		107.9					
14.1		112.8	133.9	61	212.9	2.9	
14.2		112.6					
14.3		112.4	134				
14.4		112.3					
14.5	15	116.1					
14.6		116	138		213	3	
14.7		115.9					
14.8		115.8	138.1		213.1		
14.9		115.6					
15.0		120.5	143.1		223.1	3.1	
15.1		120.3					
15.2		120.1	143.2		223.2	3.2	
15.3		120					
15.4	16	124.8	148.2				
15.5		124.6					
15.6		124.5	148.3		223.3	3.3	
15.7		124.3					
15.8		128.2	152.3		248.3		
15.9		128.1					
16.0		128	152.4		248.4	3.4	
16.1		127.7					
16.2	17	131.5	156.4	72			
16.3		131.3					
16.4		131.2	156.5		248.5	3.5	
16.5		131.2					

直径 DC	シャンク径 DCONMS	有効長 LU	溝長 LCF	シャンク長 LS	全長 OAL	先端 PL	在庫 Stock
17.0	17	131	156.5	72	248.5	3.5	
17.1		135.9	161.5		258.5		
17.2		135.8					
17.3		135.7	161.6				
17.4		135.5					
17.5	18	135.4		76			
17.6		139.2	165.6				
17.7		139					
17.8		138.9	165.7		258.7	3.7	
17.9		138.7					
18.0		143.6	170.7		268.7		
18.1		143.5					
18.2		143.4	170.8		268.8	3.8	
18.3		143.2					
18.4	19	143.1		77			
18.5		147					
18.6		146.9	174.9		268.9	3.9	
18.7		146.8					
18.8		146.6					
18.9		146.4					
19.0		151.4					
19.1		151.2					
19.2		151.1	180		279	4	
19.3		150.9					
19.4		150.8					
19.5	20	154.7		78			
19.6		154.6					
19.7		154.4	184.1		279.1	4.1	
19.8		154.3					
19.9		154.1					
20.0		162.5	193.2		284.2	4.2	
20.1		161.8	193.3		284.3	4.3	
20.2		170.3	202.5		293.5	4.5	
20.3	25	169.6	202.6	56			
20.4		178	211.7		302.7	4.7	
20.5		177.3	211.8		302.8	4.8	
20.6		185.7	220.9	60	315.9	4.9	
20.7	32	185	221	56			
20.8		185	221	60	316	5	
20.9	25	193.4	230.1	56	325.1	5.1	
21.0		193.4	230.1	60	325.2	5.2	
21.1	32	192.7	230.2	56			
21.2		201.1	239.3		334.3	5.3	
21.3		200.4	239.4		334.4	5.4	
21.4		208.8	248.5		343.5	5.5	
21.5		208.1	248.6		343.6	5.6	
21.6		216.5	257.7		352.7	5.7	
21.7		215.8	257.8		352.8	5.8	
21.8	32	224.2	266.9	60	361.9	5.9	
21.9		223.5	267		362	6	
22.0		231.9	276.1		371.1	6.1	
22.1		231.2	276.2		371.2	6.2	
22.2		239.6	285.3		380.3	6.3	
22.3		238.9	285.4		380.4	6.4	
22.4		247.3	294.5		389.5	6.5	
22.5		246.6	294.6		389.6	6.6	