


●鋼、ステンレス鋼、アルミに最適なオイルホールドリルです。ドリル径の9倍までの穴あけが可能です。

This oil hole drill is suitable for workpiece materials from Steel and Stainless Steel to Aluminum. It is possible to drill holes up to 9 × DC.

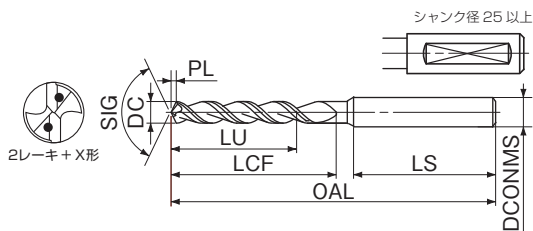

LIST 7594P

オーダ方法 SGOH9D 直径 (* 印商品 : SGOH9D 直径 × シャंक径)

単位 (Unit) : mm

直径 DC	シャंक径 DCONMS	有効長 LU	溝長 LCF	シャंक長 LS	全長 OAL	先端 PL	在庫 Stock
7.0	7	67.9	78.4	51	136.4	1.4	
7.1		73.9					
7.2		73.7	84.5		146.5	1.5	
7.3		73.6					
7.4		73.4					
7.5	8		84.6	52			
7.6		80.2					
7.7		80.1	91.6		146.6	1.6	
7.8		79.9					
7.9		79.8					
8.0		79.7	91.7		146.7		
8.1		84.6					
8.2		84.4	96.7		158.7	1.7	
8.3		84.3					
8.4		84.1					
8.5	9		96.8	53			
8.6		88.9					
8.7		88.8	101.8		158.8	1.8	
8.8		88.6					
8.9		88.5					
9.0		88.4	101.9		158.9		
9.1		93.3					
9.2		93.1	106.9		169.9	1.9	
9.3		93					
9.4		92.8					
9.5	10		107	54			
9.6		97.6					
9.7		97.5	112		170	2	
9.8		97.3					
9.9		97.1	112.1		170.1		
10.0		97.1					
10.1		103				2.1	
10.2		102.8	118.1		197.1		
10.3		102.7					
10.4		102.6	118.2				
10.5		102.5					
10.6	11		107.3		197.2	2.2	
10.7		107.2	123.2				
10.8		107					
10.9		106.8	123.3		197.3		
11.0		106.8					
11.1		112.7		60		2.3	
11.2		112.5	129.3		209.3		
11.3		112.4					
11.4		112.3	129.4				
11.5	12		112.2		209.4	2.4	
11.6		117					
11.7		116.9	134.4				
11.8		116.7					
11.9		116.5	134.5		209.5		
12.0		116.5					
12.1		122.4				2.5	
12.2		122.2	140.5		221.5		
12.3		122.1					
12.4		122					
12.5	13		121.9	61		2.6	
12.6		126.7					
12.7		126.6	145.6		221.6		
12.8		126.5					
12.9		126.4	145.7		221.7	2.7	

直径 DC	シャंक径 DCONMS	有効長 LU	溝長 LCF	シャंक長 LS	全長 OAL	先端 PL	在庫 Stock
13.0	13	126.2	145.7		221.7		
13.1		132.1				2.7	
13.2		131.9	151.7		233.7		
13.3							
13.4		131.7	151.8				
13.5	14		131.6		233.8	2.8	
13.6		136.4					
13.7		136.3	156.8				
13.8		136.2					
13.9		136.1	156.9		233.9		
14.0		135.9				2.9	
14.1		141.8	162.9		245.9		
14.2		141.6					
14.3							
14.4		141.4	163	61			
14.5	15		141.3		246	3	
14.6		146.1	168				
14.7		146					
14.8		145.9	168.1		246.1		
14.9		145.8				3.1	
15.0		145.6					
15.1		151.5	174.1		258.1		
15.2		151.3					
15.3							
15.4		151.1	174.2		258.2	3.2	
15.5	16		151				
15.6		155.8	179.2				
15.7							
15.8		155.6	179.3		258.3	3.3	
15.9		155.5					
16.0		155.3					
16.1		161.2	185.3		290.3		
16.2		161.1					
16.3		161	185.4		290.4	3.4	
16.4		160.8					
16.5		160.7	190.4	72			
16.6	17		165.5				
16.7		165.3	190.5		290.5	3.5	
16.8		165.2					
16.9		165.1					
17.0		165					
17.1		170.9	196.5		302.5		
17.2		170.8					
17.3		170.7	196.6		302.6	3.6	
17.4		170.5					
17.5		170.4	201.6	76			
17.6	18		175.2				
17.7		175					
17.8		174.9	201.7		302.7	3.7	
17.9		174.7					
18.0		174.7					
18.1		180.6	207.7		314.7		
18.2		180.5					
18.3		180.4	207.8		314.8	3.8	
18.4		180.2					
18.5	19		180.1				
18.6		185					
18.7		184.9	212.9		314.9	3.9	
18.8		184.7					
18.9		184.6					

直径 DC	シャंक径 DCONMS	有効長 LU	溝長 LCF	シャंक長 LS	全長 OAL	先端 PL	在庫 Stock
19.0	19	184.4	212.9	77	314.9	3.9	
19.1		190.4					
19.2		190.2					
19.3		190.1	219		327	4	
19.4		189.9					
19.5	20		189.8	78			
19.6		194.7					
19.7		194.6					
19.8		194.4	224.1		327.1	4.1	
19.9		194.3					
20.0		194.1					
20.5		204.5	235.2		331.2	4.2	
21.0		203.8	235.3		331.3	4.3	
21.5	25		214.3	56	342.5	4.5	
22.0		213.6	246.6		342.6	4.6	
22.5		224	257.7		353.7	4.7	
23.0		223.3	257.8		353.8	4.8	
*23.5	32	233.7	268.9	60	368.9	4.9	
23.5				56			
*24.0	25	233	269	60	369	5	
24.0	32			60			
*24.5	25	243.4	280.1	56	380.1	5.1	
24.5	32			60			
*25.0	25	242.7	280.2	56	380.2	5.2	
25.0							
25.5		253.1	291.3		391.3	5.3	
26.0		252.4	291.4		391.4	5.4	
26.5		262.8	302.5		402.5	5.5	
27.0		262.1	302.6		402.6	5.6	
27.5		272.5	313.7		413.7	5.7	
28.0		271.8	313.8		413.8	5.8	
28.5	32	282.2	324.9	60	424.9	5.9	
29.0		281.5	325		425	6	
29.5		291.9	336.1		436.1	6.1	
30.0		291.2	336.2		436.2	6.2	
30.5		301.6	347.3		447.3	6.3	
31.0		300.9	347.4		447.4	6.4	
31.5		311.3	358.5		458.5	6.5	
32.0		310.6	358.6		458.6	6.6	

新商品

超硬ドリル

ハイスドリル

タップ

超硬
エンドミルハイス
エンドミル

切断工具

バック・
セット商品
その他

精密工具

技術資料
索引