



# ALHE2-4D

## 超硬2枚刃アルミ用エンドミル 4Dタイプ

Carbide 2-Flute End Mill 4D Type for Aluminum




アルミ加工に最適な2枚刃4Dタイプの超硬エンドミルです。

Carbide end mill 2-flute 4D type for Aluminum

単位(Unit):mm

TYコード Code	外径 DC	刃長 APMX	全長 OAL	シャンク径 DCON	形状 Type
YK07685	1	4	60	4	1
YK07686	2	8	60	4	1
YK07687	3	12	70	6	1
YK07688	4	16	70	6	1
YK07689	5	20	70	6	1
YK07690	6	24	75	6	2
YK07691	7	28	80	8	1
YK07692	8	32	90	8	2
YK07693	9	36	90	10	1
YK07694	10	40	90	10	2
YK07695	11	44	100	12	1
YK07696	12	48	100	12	2
YK07697	13	52	110	12	3
YK07698	14	56	120	12	3
YK07699	15	60	120	16	1
YK07700	16	64	130	16	2
YK07701	18	72	140	16	3
YK07702	20	80	150	20	2

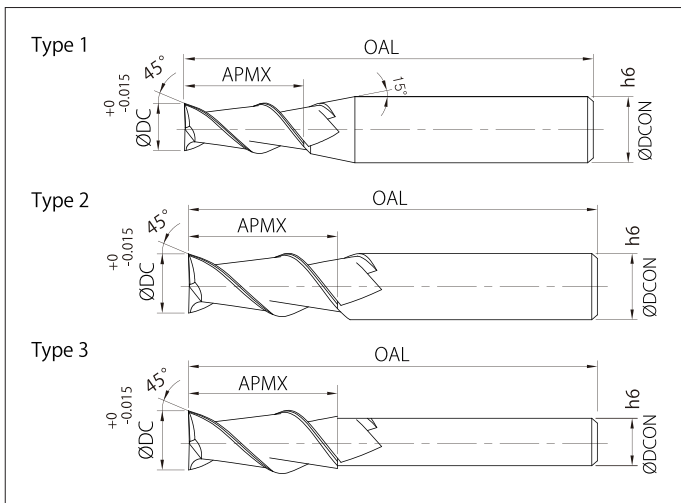

### ALHE2-4D 基準切削条件表 Recommended Milling Conditions

被削材 Work Material	アルミニウム Aluminium	
	側面切削 Side Cutting	
外径 Mill Dia.	回転数 Rotation min-1	送り Feed mm/min
1	8435	255
2	5650	235
3	5000	270
4	5000	330
5	5000	390
6	5000	450
7	4425	450
8	4000	540
9	4000	585
10	4000	630
11	4000	705
12	4000	780
13	3500	720
14	3000	660
15	3000	690
16	3000	720
18	2000	540
20	2000	570

切込み量 :  
Depth of Cut