



# ALHE3-5D

## 超硬3枚刃アルミ用エンドミル 5Dタイプ

Carbide 3-Flute End Mill 5D Type for Aluminum




アルミ加工に最適な3枚刃5Dタイプの超硬エンドミルです。

Carbide end mill 3-flute 5D type for Aluminum

単位(Unit):mm

TYコード Code	外径 DC	刃長 APMX	全長 OAL	シャンク径 DCON	形状 Type
YK07387	3	15	80	6	1
YK07388	4	20	80	6	1
YK07389	5	25	80	6	1
YK07390	6	30	90	6	2
YK07391	7	35	90	8	1
YK07392	8	40	100	8	2
YK07393	9	45	110	10	1
YK07394	10	50	110	10	2
YK07395	11	55	120	12	1
YK07396	12	60	120	12	2
YK07397	13	65	150	12	3
YK07398	14	70	150	12	3
YK07399	15	75	160	16	1
YK07400	16	80	160	16	2
YK07401	18	90	180	16	3
YK07402	20	100	180	20	2

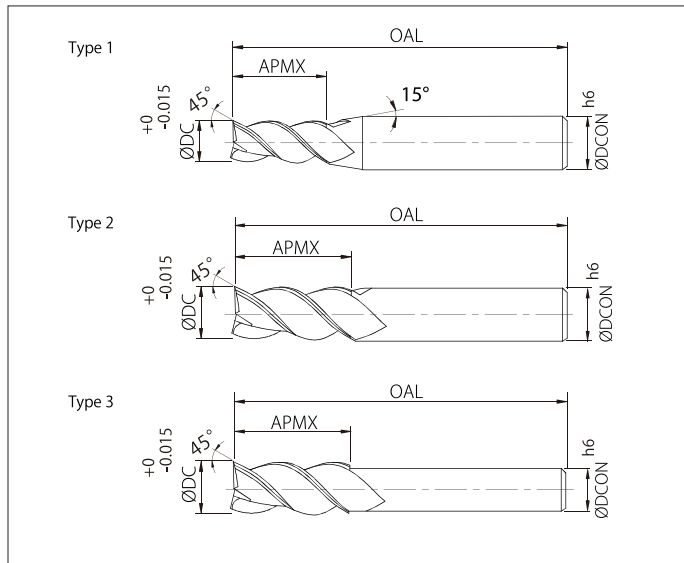

### ALHE3-5D 基準切削条件表 Recommended Milling Conditions

被削材 Work Material	アルミニウム Aluminium		アルミニウム合金 Aluminium Alloy	
	側面切削 Side Cutting			
外径 Mill Dia.	回転数 Rotation min-1		送り Feed mm/min	
3	14000		1085	
4	11200		1085	
5	9100		1050	
6	7700		1050	
7	6650		1120	
8	5600		1155	
9	5320		1085	
10	4550		1050	
11	4060		1050	
12	3710		1050	
13	3500		1050	
14	3220		1050	
15	3010		1050	
16	2800		1015	
18	2485		980	
20	2240		945	

切込み量 : Depth of Cut	
------------------------	--