


●圧倒的な長寿命と低トルクの盛上げタップ

Overwhelmingly long tool life and low torque forming tap

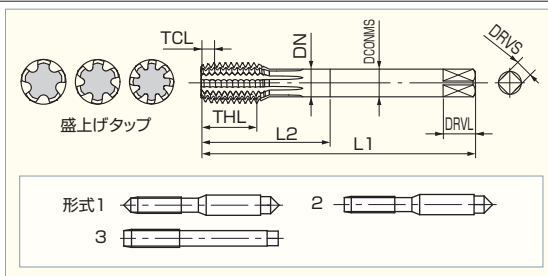

LIST 8800

オーダ方法 ZTF 記号 - 食付

単位 (Unit) : mm

記号 Code No.	食付 (P) TCL (P)	呼び Thread Size	等級 TAP Limit	全長 L1	ねじ長さ THL	ローブ数 Lobes	シャンク径 DCONMS	首下長さ L2	首径 DN	形式 Type	在庫 Stock	参考価格 (円) Price (¥)
3M0.5R	P	M3 × 0.5	REG R5	46	5.6	5	4	18	2.35	1	●	3,600
3M0.5R	B											3,600
4M0.7R	P	M4 × 0.7	REG R6	52	8.1	5	5	20	3.15	1	●	3,700
4M0.7R	B											3,700
5M0.8R	P	M5 × 0.8	REG R6	60	9.4	5	5.5	22	4.05	1	●	3,910
5M0.8R	B											3,910
6M1R	P	M6 × 1	REG R7	62	9	5	6	24	4.75	1	●	4,110
6M1R	B											4,110
8M1.25R	P	M8 × 1.25	REG R7	70	11.6	6	6.2	-	-	3	●	5,530
8M1.25R	B											5,530
8M1R	P	M8 × 1	REG R7	70	9.3	6	6.2	-	-	3	●	6,270
8M1R	B											6,270
10M1.5R	P	M10 × 1.5	REG R7	75	14.2	8	7	-	-	3	●	6,740
10M1.5R	B											6,740
10M1.25R	P	M10 × 1.25	REG R7	75	11.8	8	7	-	-	3	●	6,740
10M1.25R	B											6,740
10M1R	P	M10 × 1	REG R7	75	9.3	8	7	-	-	3	●	7,490
10M1R	B											7,490
12M1.75R	P	M12 × 1.75	REG R8	82	16.8	8	8.5	-	-	3	●	10,300
12M1.75R	B											10,300
12M1.5R	P	M12 × 1.5	REG R7	82	15.7	8	8.5	-	-	3	●	10,300
12M1.5R	B											10,300
12M1.25R	P	M12 × 1.25	REG R7	82	12.9	8	8.5	-	-	3	●	10,300
12M1.25R	B											10,300
12M1R	P	M12 × 1	REG R7	82	10.1	8	8.5	-	-	3	●	13,000
12M1R	B											13,000
14M2R	P	M14 × 2	REG R10	88	19.4	8	10.5	-	-	3	●	16,100
14M2R	B											16,100
14M1.5R	P	M14 × 1.5	REG R9	88	15.7	8	10.5	-	-	3	●	16,100
14M1.5R	B											16,100
16M2R	P	M16 × 2	REG R10	95	19.4	8	12.5	-	-	3	●	20,000
16M2R	B											20,000
16M1.5R	P	M16 × 1.5	REG R9	95	15.7	8	12.5	-	-	3	●	20,000
16M1.5R	B											20,000

・食付は B 形 =2P、P 形 =4P TCL : B=2P、P=4P

新商品

超硬ドリル

ハイスドリル

タップ

超硬
エンドミル

ハイス
エンドミル

切断工具

バック・
セット商品
その他

精密工具

技術資料
索引